

EVERCOAT®


INNOVATIVE SOLUTIONS
THAT PERFORM.



METAL GLAZE
OPTEX
COLOR-CHANGING TECHNOLOGY



Ultra Premium Finishing Putty

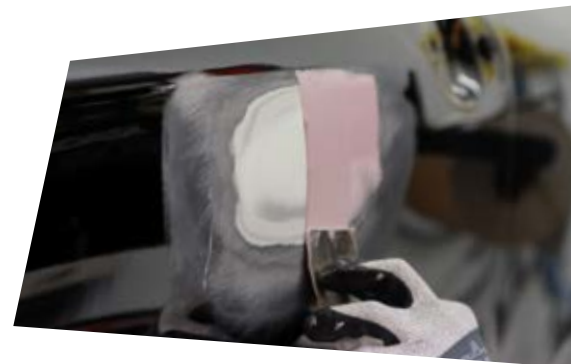

+

Ultra premium finishing putty

Colour change technology

Self levelling

Superior sanding and adhesion properties

Unique thinner viscosity

Speed of cure

METAL GLAZE OPTEX is the world's best sanding polyester putty for use as a finishing coat over body filler, large panels, or small spot filling. Its unparalleled adhesion and sanding qualities are a result of the patented **ECORESIN™**. METAL GLAZE OPTEX uses a color change technology that optically transitions from lavender to a mint green.



CATALYZED



14 - 18 MINUTES

METAL GLAZE OPTEX™

101385 – 880ml

*Test it yourself and
experience the many
advantages it brings to
your repair process!*

TECHNICAL DATA SHEET

METAL GLAZE OPTEX™

Ultra Premium Finishing Putty

EVERCOAT®

Edition: SP04.00567 - Rev.01 | Page 1/2

DESCRIPTION AND APPLICATION	METAL GLAZE OPTEX is the world's best sanding polyester putty for use as a finishing coat over body filler, large panels, or small spot filling. Its unparalleled adhesion and sanding qualities are a result of the patented ECORESIN. METAL GLAZE OPTEX uses a new patent pending color change technology that optically transitions from lavender to a mint green.
SUBSTRATES	Sanded Body Filler, Steel, Aluminum, Fiberglass, E-Coat, Silicon Bronze Welds, Sanded OEM Paint, Galvanized Steel, SMC, Stainless Steel, Cured sanded 2K primer, Rigid to Semi-Rigid Thermoset Plastics.
PREPARATION	Clean and degrease the entire panel to be repaired with soap and water, followed by a mild cleaning solvent. Thoroughly dry the surface before repairing. Use P80-P180 grit to remove or scuff the paint and featheredge P180-P220.
MIXING	Place the desired amount of material on a clean, non-fibrous surface. Knead the cream hardener before use. Measure hardener 2% by weight by adding a ribbon of cream hardener from edge to edge across the center of a 4" (10 cm) diameter puddle. Puddles larger than 4" in diameter will require additional hardener. Mix thoroughly until uniform color is achieved.
APPLICATION	Spread a thin layer of mixed material over surface using firm pressure. Apply additional layers to build material slightly higher than the surface to allow for sanding to desired contour. The repair will gradually change colors from lavender to a mint green, indicating the repair is dry and ready to sand. NOTE: Do not apply over new or uncured coatings. Avoid thick heavy applications.
FINISHING	Sand to contour with P180 grit sandpaper. Final sand with P180-P220 grit followed by P180-P320 grit if desired. Apply 2K polyester, 2K urethane, 2K epoxy, or 1K primer to manufacturer's recommendations.
TECHNICAL DATA	Color Lavender
	Physical state Liquid
	Solubility Not soluble in cold and warm water
	Working time 2.5 - 4.5 minutes
	Dry to sand time 14 - 18 minutes
	Corrosion Protection 500 hours salt spray (Harshaw)
	Maximum build 3 mm (sanded)
	Ingredients and Precautions Safety data sheet (MSDS) available on request
VOC EU limit values: 250g/l. (2007) This product contains a maximum of 42 g/l VOC	
Properties are typical values and should not be considered as sales specifications. Physical testing performed@ -72°F (22°C) 75% RH unless otherwise noted.	
STABILITY	Best before date: 18 month from manufacturing date. The manufacturing date is within the batch-identification number on the bottom of the can or on the label. The batch-identification is composed as follow: 8 10 233 8 = year 2018 10 = month Octobre 233 = running batch number
STORAGE	Store in accordance with local regulations. Observe label precautions. Do not store above the following temperature: 25°C. Store in a cool, well-ventilated area away from incompatible materials and ignition sources. Keep away from: oxidising agents, strong alkalis, strong acids. No smoking. Prevent unauthorised access. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not empty into drains. Never return mixed product back into container.
SAFETY INSTRUCTIONS	Read all directions and warnings prior to using Evercoat® products. Safety Data Sheets can be found online at https://itwevercoat-sds.thewerco.com/ . Never return mixed filler to container. NOTE: Keep can closed and store in a cool dry place. USE WITH EVERCOAT CREAM HARDENER ONLY!

EVERCOAT



Official distributor
partner for Europe

INDASA - INDÚSTRIA DE ABRASIVOS, S.A.

Apartado 3005
3801-101 Aveiro, Portugal
Tel. +(351) 234 303 600
Fax +(351) 234 303 605
E-mail: indasa@indasa.pt

Your EVERCOAT partner:

